


1.13 JUMPER CABLE SMA JACK TO IPX R/A MALE
SMA-C-KY1.13/IPX-1.13-53±3mm

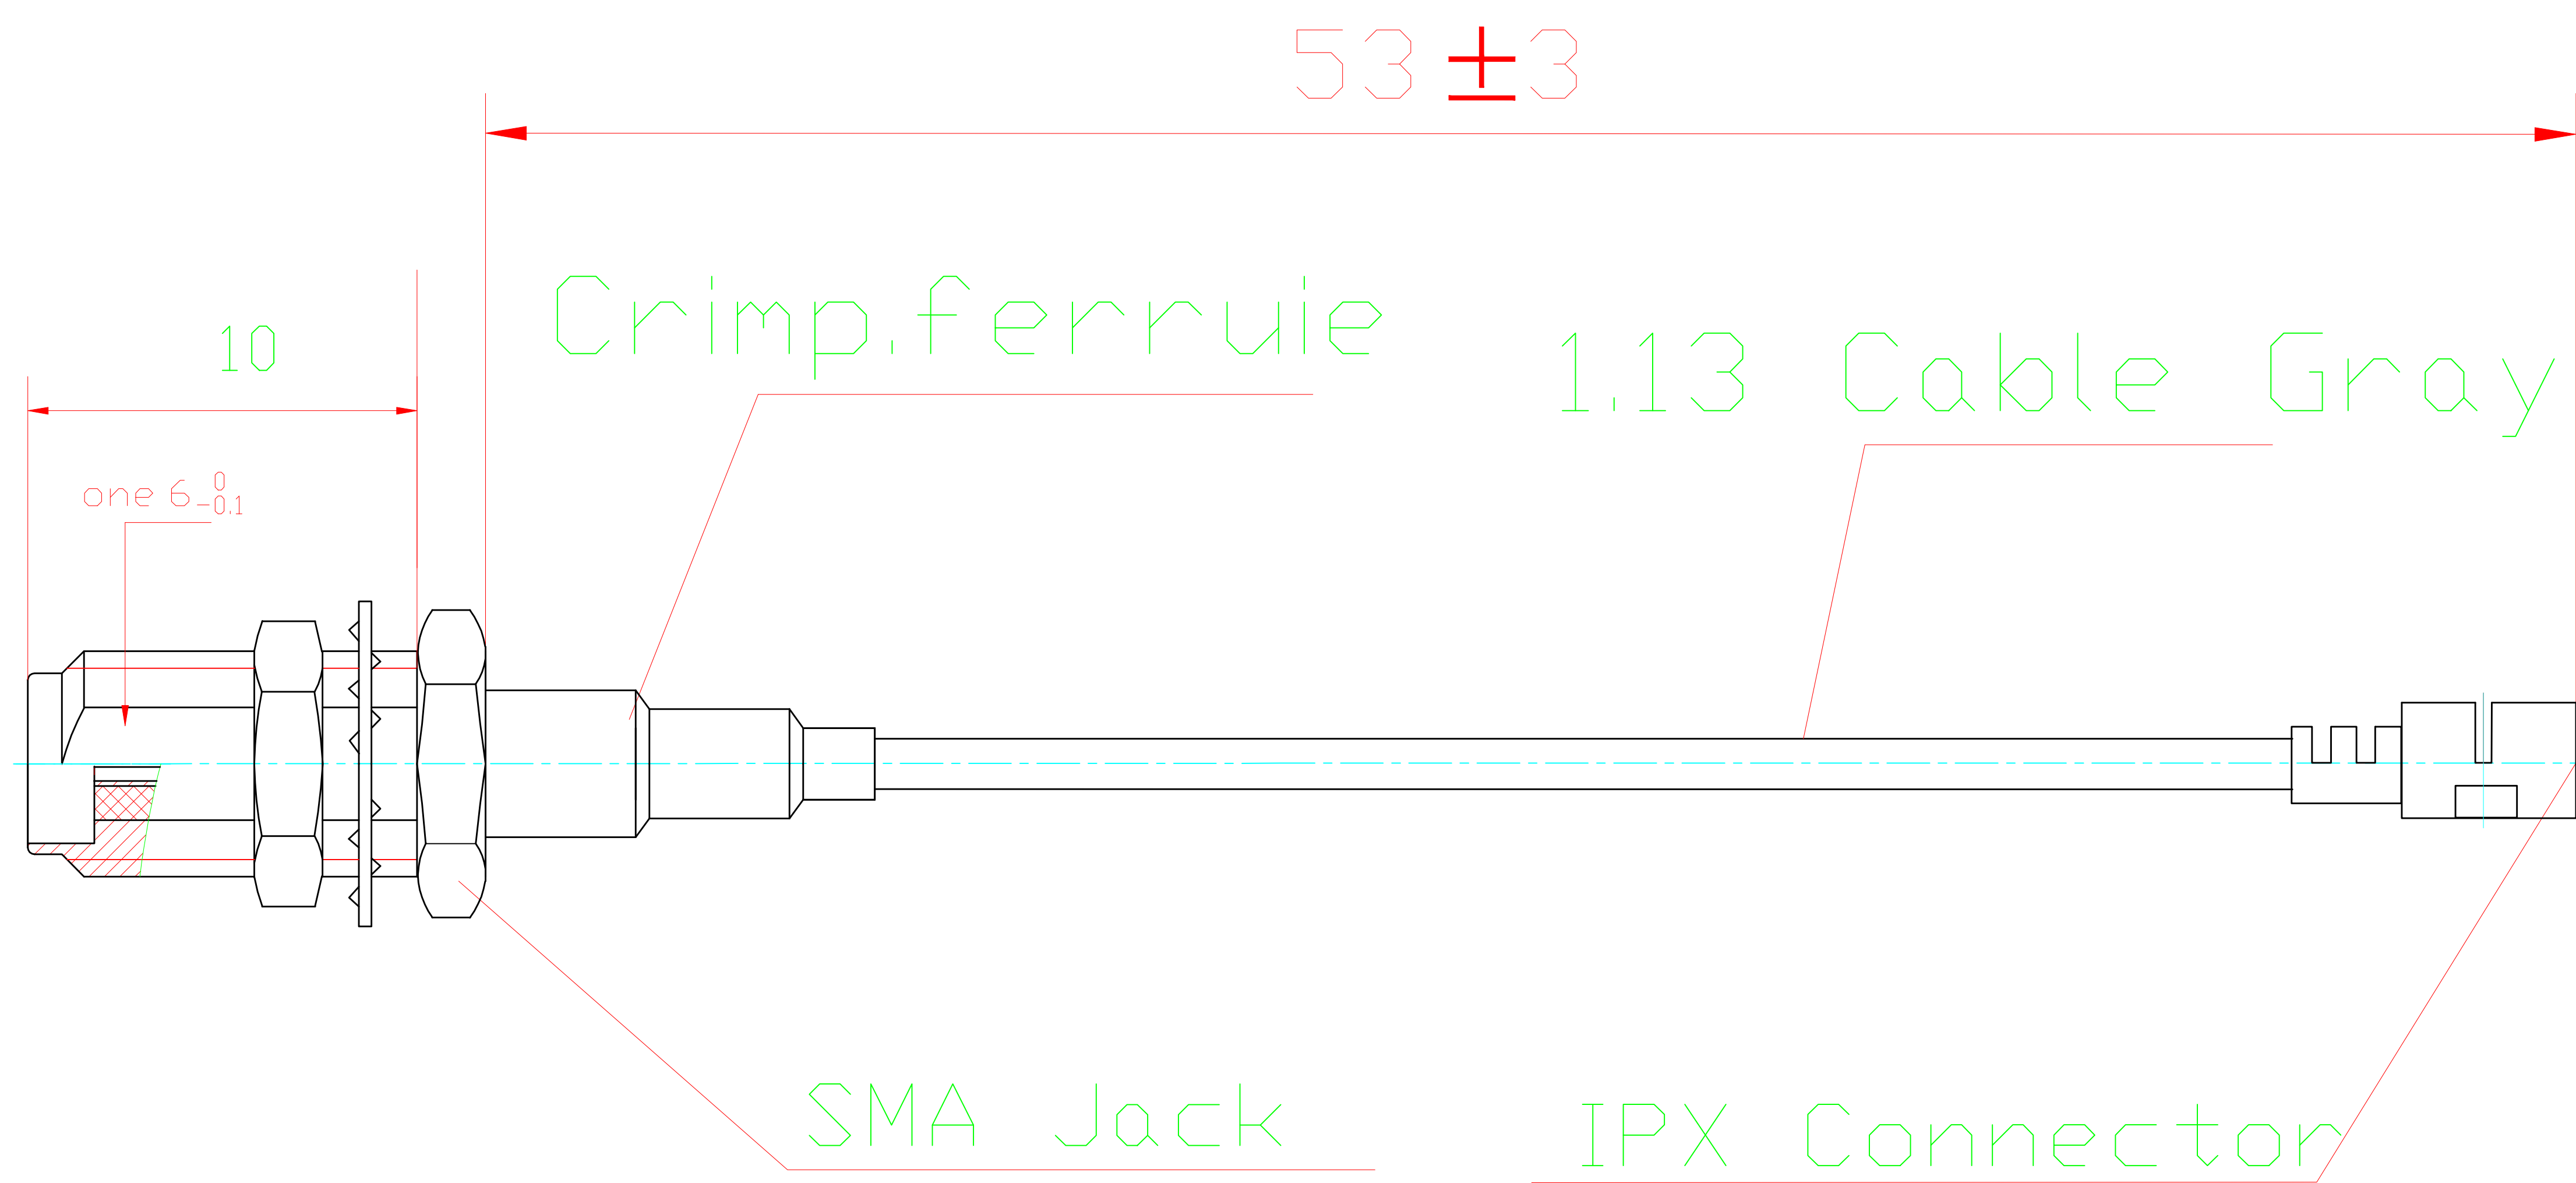

Interface

According to

IEC 60169-15

Electrical

Characteristic Impedance	50 ohm
Frequency Range	DC-6GHz
Rated.voltage	60V
Test.Voltage	200V
Dielectric Resistance	≥ 500MΩ

Mechanical

Durability	Mating cycles ≥ 500
------------	---------------------

Material and plating

	Material	plating
Body	Brass	Au0.05
Insulator	PTFE	-
Center conductor	Beryllium copper	Au0.05
Nut	Brass	Au0.05

Environmental

Temperature Range	-40°C ~ +85°C
-------------------	---------------